

"SINCE 1998"



KSP[®]
konya spare parts
automotive spare parts manufacturers co.

**SERVING TO ENGINE
RECONDITIONING SPECIALISTS...**

MACHINE TOOL DIVISION




VR 2011

VALVE GRINDING MACHINE

VALVE REFACER

VR 2011

www.kspipekyolu.com

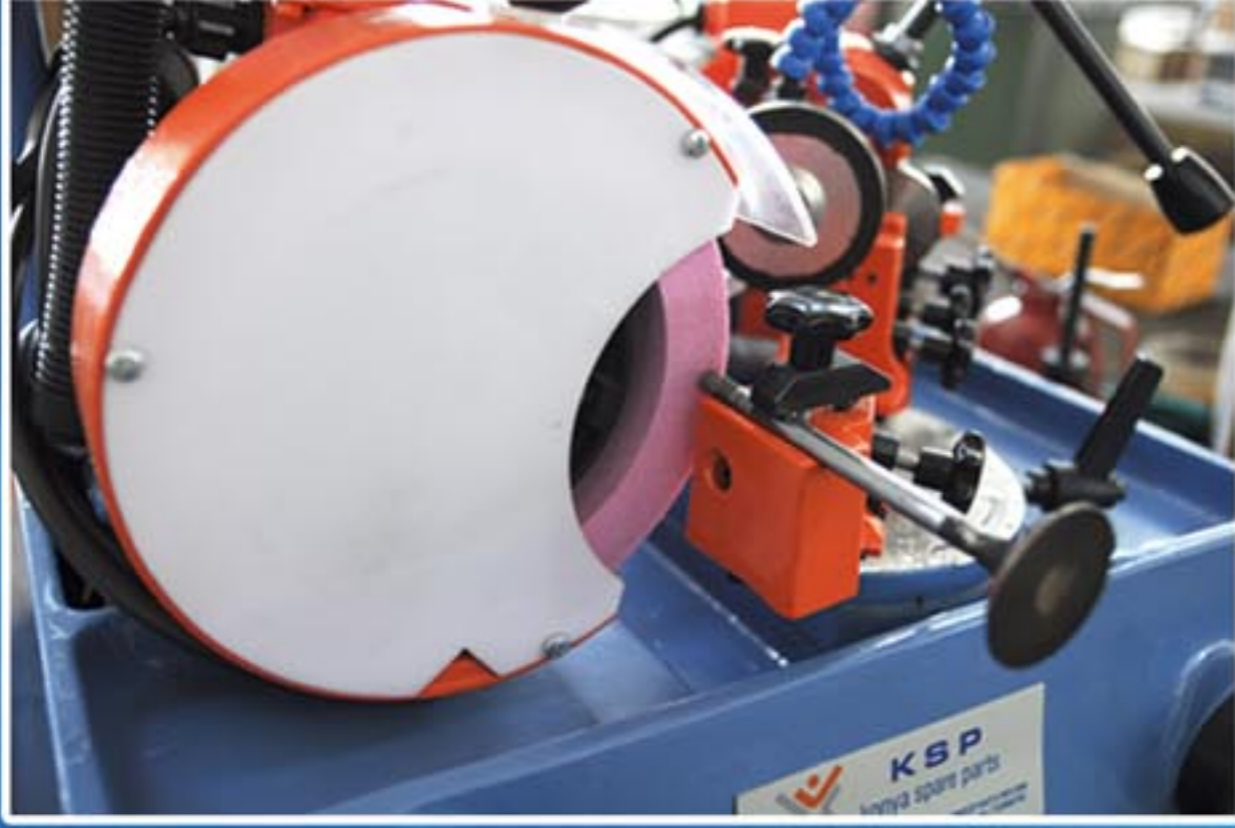

The precision and genuine double V locking system is the most important key features of our VALVE REFACERS. Instead of traditional locking systems with collets or chucks; we use double V locking system, it is providing high accuracy grinding and this system has extremely easy use.

It has given to grind engine valves on requested angle. You can do valve end grinding and valve rocker refacing. Additionally, you would sharpening grinding stone with a special apparatus.

TECHNICAL SPECIFICATIONS

Refacing is possible for 4 (5/32") -18(23/32") mm. valve stem or bigger.

Grinding angle from 15° to 50°

Head diameter is max 90 mm.

Valve length overall is maximum 340 mm.

Grinding wheel size is 175 x 35 mm.

Grinding wheel speed is 2800 rpm.

Voltage is 380/50 Hz., other voltages on request

Valve grinding wheel speed is 14 rpm.

Wet grinding by centrifugal pump

Incorporated coolant pump

Cast Iron construction

Weight 70 kg. approx. without table



NO NEED TO COLLET NO LINING NEEDED



KSP[®]
konya spare parts
automotive spare parts manufacturers co.

KONYA SPARE PART IPEKYOLU AUTOMOTIVE SPARE PARTS MANUFACTURERS CO.

Beyazit Mah. Hüsn-ü Aşk Sk. Konevi
İş Merkezi Kat: 2 No: 209 - 42040
KONYA / TÜRKİYE

Phone : +90 332 351 31 11 (pbx)
Fax : +90 332 351 66 36
e-mail : ksp@ttmail.com | info@kspipekyolu.com